


LTIONITE

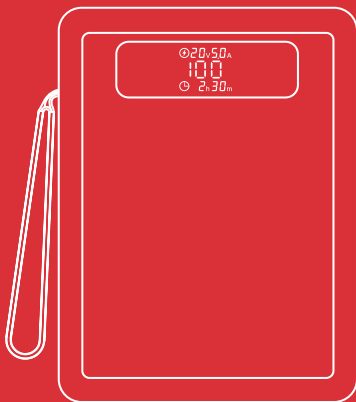

**200W USB-C PD Power Bank
LiFePO4 Battery**

USER MANUAL

Product Specification

Product Name: Falcon Power Bank

Model No.: PD-200LS

Capacity: 62000mAh/3.2V/198.4Wh

INPUT:

Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A 100W Max

OUTPUT:

Type-C1/C2: 5V=3A, 9V=3A, 12V=3A, 15V=3A, 20V=5A(100W Max)

Type-C1+C2: 100W+100W(200W Max)

USB A1/A2: 5V=3A

USB A1+A2: 5V=3.4A Max

Type-C1+C2+USB A1+A2: 130W+15W(145W Max)


Dimension: 205x155x40 mm

N.W: 1.4kg

Package Contents


- 1: PD Power Bank
- 2: 100W USB-C Cable
- 3: Protective Pouch
- 4: User Guide

Feature Details

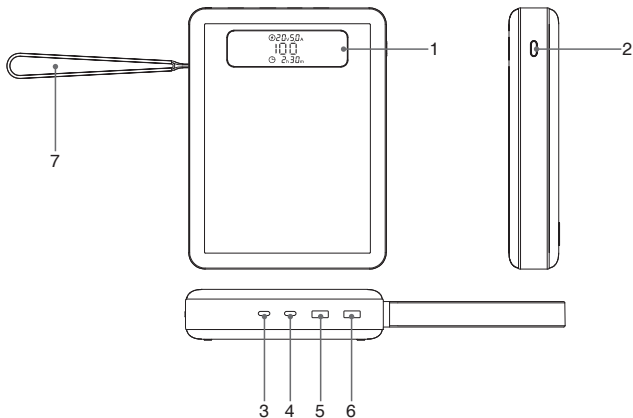

- | | |
|---|--------------------|
| 1. LCD Display Screen | 4. Type-C 2 |
| 2. Battery level query | 5. USB-A 1 |
| Multi-port output power switching query | 6. USB-A 2 |
| 3. Type-C 1 | 7. Silicone handle |

LCD Display

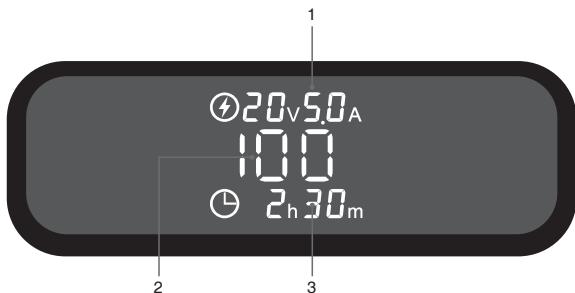

NOTE: There is a protective film on the LCD screen, you can remove it or leave it before using.

1. Charging/Discharging Power
2. Charging / Discharging Battery Power Level
3. Remaining Discharging Time

ATTENTION:

When the two devices are charging at the same time, press the button one time, the screen display the one output port remaining power, battery power level and discharging time.

Important Information

To maximize battery performance, fully discharge and recharge the power bank during the first 3 uses.

1. Please do not allow children to use this product.
2. The use of non-recommended products or accessories increases the risk of electric shock.
3. Please be sure to use this product in a ventilated environment.
4. Please store the product in a dry and ventilated place to avoid moisture and electric shock.
5. Please unplug the power plug when the product is not in use.
6. Please do not expose the product to fire or excessive heat. It will explode if the temperature exceeds 130°C/266°F.
7. Please do not disassemble the product. It can lead to fire, explosion, injury and unpredictable risks.
8. Please do not use products with damaged cords or plugs, or damaged output cables. Electric shock may result.

Tips for Best Performance

- Use certified 100W cables
- USB-C laptops may require PD support
- Charging speed depends on device protocol
- Simultaneous outputs reduce available power

FAQ

Q1: What devices can the product charge/power?

A: It can charge for: Smartphone, Tablet, Drone, Laptop, Camera, Gaming console etc.

Q2: What environment is easy to cause product damage?

A: Wet grassland, wet coastline, rain, fog and snow, high temperature environment.

Tips: Try to use the equipment in a ventilated and dry environment, in order to prevent damage to the above environment do not use.

Q3: Can i carry this product on the plane?

A: This product exceeds the standard airline carry-on battery limit in many countries. Please check with your airline before travel.

Litionite S.R.L.

Via Marchetti 46

60019 Senigallia (AN) Italy

Mail: info@litionite.com

Website: www.litionite.com